

P 專業LED照明
Professional
////////// LED Lighting

 **Ecotech** 環態源

鰭片散熱設計
Fin Design



LED 蠟燭燈
Candle Light

香港品牌
Hong Kong Brand

信心保證
Guaranteed Warranty

節電高效 Energy saving and high efficient

110-240V 50-60Hz

二年保用 Two years warranty

環態源環境科技有限公司
ECOTECH ENVIRONMENTAL TECHNOLOGY LTD.

S STRUCTURE

結構

鋁片魚鰭設計，穿孔結構利於對流散熱，減少光衰並有效提升燈具使用壽命

Heat dispersing fin design provides an excellent thermal management and forms convection which is better for heat dissipation. The design makes the light with longer life and high lumen maintenance.

E14螺旋頭設計，方便更換

E14 screw base, easy for replacement.

電源採用智能芯片控制電路，電流恒定無閃頻，具有開路、短路、過壓、欠壓等保護，使用更穩定，有效延長燈珠壽命；並符合國際標準


Driver uses intelligent chip to control circuit, constant current, no flash, with open circuit, short circuit, overload, overvoltage, undervoltage protection, stable, effectively extending the life of the light beads; and comply with international standards.

光源採用SMD LED芯片，耗能低、高光效，壽命長、體積小、無輻射

It adopts SMD LED as the light source with many advantages including lower energy consumption, higher efficiency, longer life, smaller size and no radiation.


高檔光學級PC燈罩 透光率高達95%以上,光綫均勻,晶瑩剔透

High quality optical level PC cover increases transmission rate to 95% above and makes the light high uniformity and brightness.

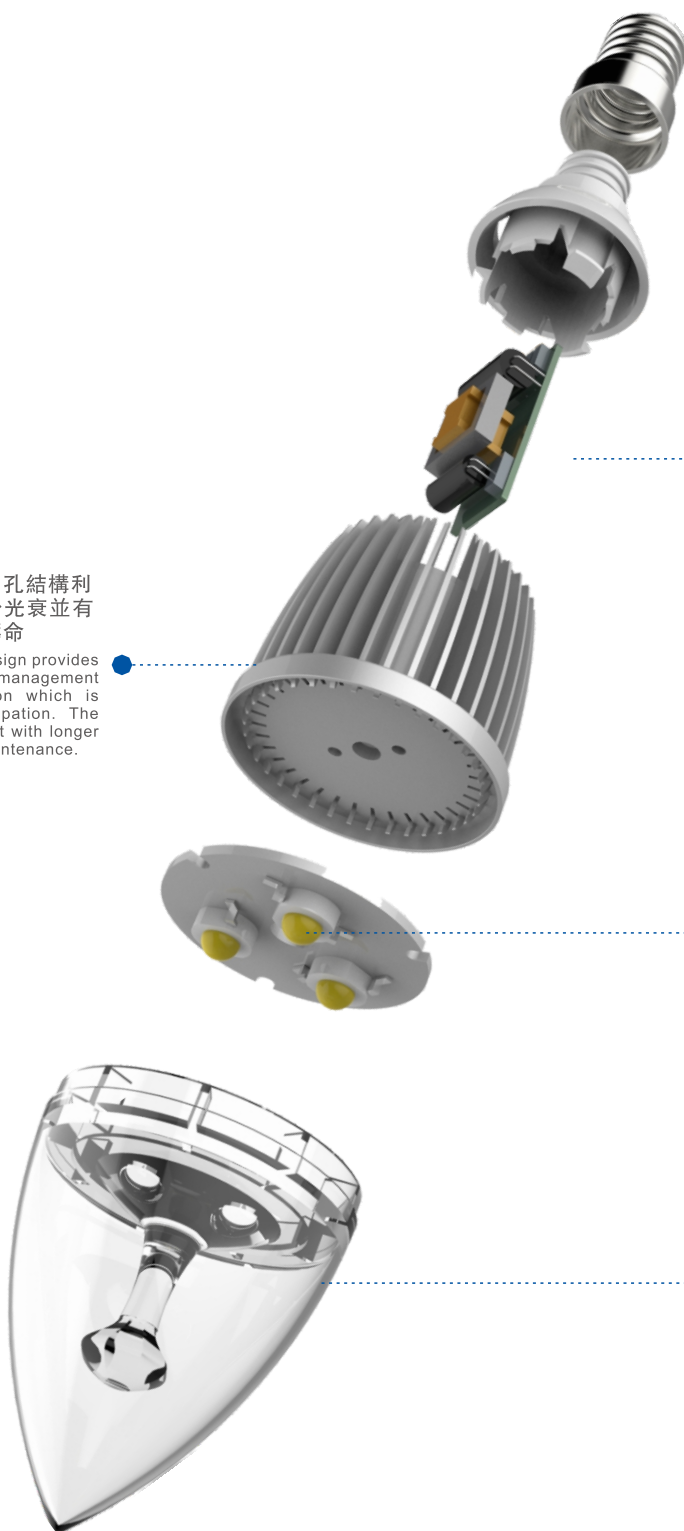

CANDLE LIGHT


蠟燭燈

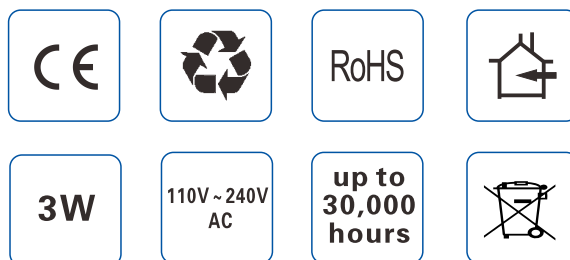


規格詳述 (Specification)

產品名稱 (Product name)	LED蠟燭燈 (LED Candle Light)
產品型號 (Model No.)	ECO-CA03E14WA
應用範圍 (Application)	室內照明 (Indoor Lighting)
物料 (Material)	銀白色外殼 (Oxidized Silver Shell)
功率 (Power)	3W
輸入電壓 (Input voltage)	110V ~ 240V
工作頻率 (Working frequency)	50 ~ 60Hz
工作溫度 (Working temperature)	-20℃ ~ +60℃
顯色指數 (Color rendering index)	Ra≥75
功率因數 (Power factor)	>0.65
光通量 (Luminous flux)	290lm
發光角度 (Beam angle)	>110°
色溫 (Color temperature)	2500 ~ 2800K/3900 ~ 4200K
使用壽命 (Service life)	Up to 30,000hrs


尺寸圖
(SIZE)

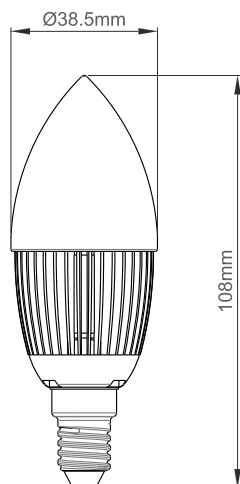

配光曲綫圖
(LIGHT DISTRIBUTION CURVE)

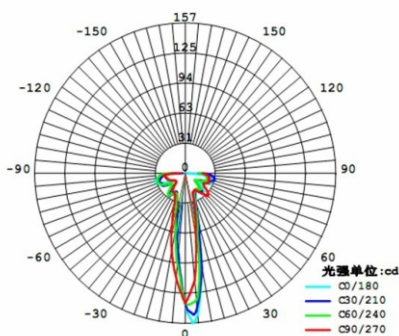

照度圖
(ILLUMINANCE DIAGRAM)

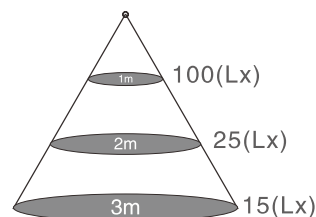

A PPLICATION 應用場合

廣泛應用於酒店、高檔會所、禮堂、家居商業等照明場所。超高亮度，理想美化效果,晶瑩剔透。
Widely used in hotel, club, auditorium, Home Furnishing, commercial lighting and other places. Ultra high brightness, good beautifying effect.



A ITERNATIVE 替代方案

型號 Model	LED蠟燭燈 LED Candle Light		傳統鎢絲燈 Incandescent Light		節電率 Energy Saving
	功率 Power	使用壽命 Service Life	功率 Power	使用壽命 Service Life	
ECO-CA03E14WA	3W	30000hrs	25W	1000-2000hrs	>80%

以上資料祇供參考 For Reference Only

環態源環境科技有限公司(香港總公司)

ECOTECH ENVIRONMENTAL TECHNOLOGY LTD.(HONG KONG HEAD OFFICE)

地址：香港新界荃灣青山道388號中國染廠大廈25樓A室

Add: Unit A, 25/F, CDW Building, 388 Castle Peak Road, Tsuen Wan, N.T., Hong Kong

電話(Tel): +852-2304-8808

傳真(Fax): +852-2389-8453

網頁(Website): www.ecotech-hk.com

郵箱(E-mail): services@ecotech-hk.com

分公司 Subsidiaries

環態源科技發展(深圳)有限公司
ECOTECH TECHNOLOGY DEVELOPMENT(SHENZHEN)CO.,LTD.

環態源科技發展(長沙)有限公司
ECOTECH TECHNOLOGY DEVELOPMENT(CHANGSHA)CO.,LTD.

環態源科技發展(晉江)有限公司
ECOTECH TECHNOLOGY DEVELOPMENT(JINJIANG)CO.,LTD.

環態源工程技術(撫順)有限公司
ECOTECH ENGINEERING TECHNOLOGY (FUSHUN)CO.,LTD.