


P 專業LED照明
Professional
LED Lighting

 **Ecotech** 環態源

型材散熱設計
Aluminium
heat sink

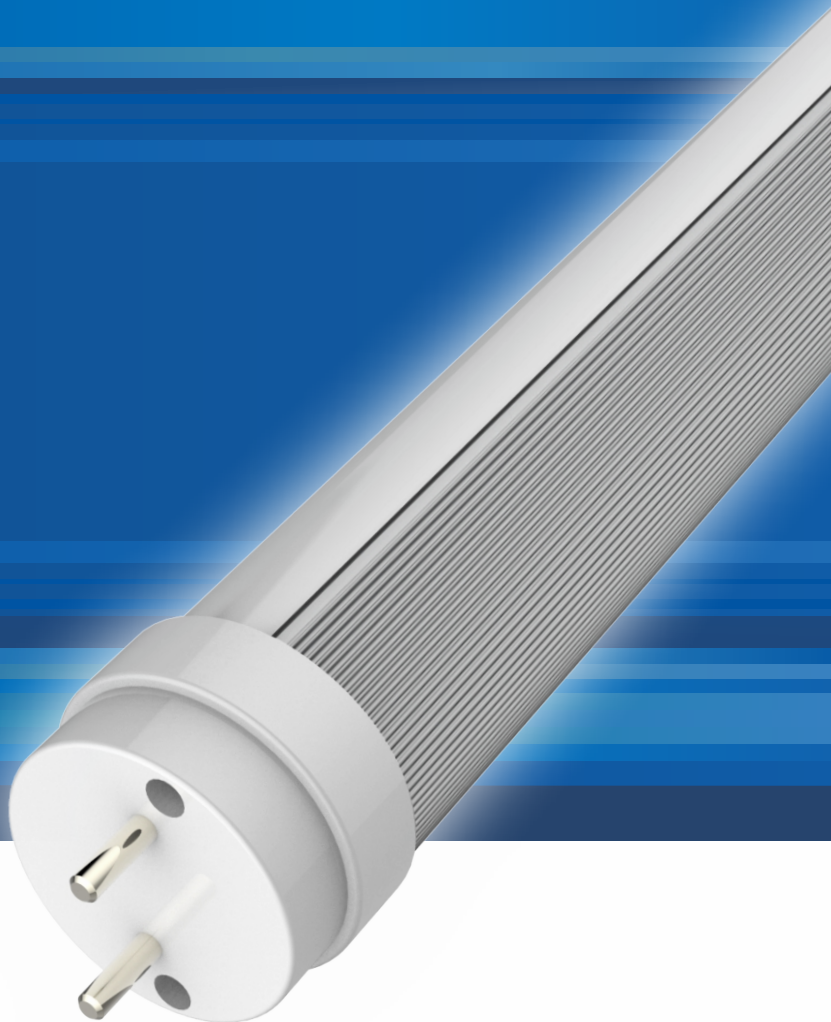

LED 燈管
Tube

香港品牌
Hong Kong Brand

信心保證
Guaranteed Warranty

節電高效 Energy saving and high efficient

110V-240V 50-60Hz

二年保用 Two years warranty

環態源環境科技有限公司
ECOTECH ENVIRONMENTAL TECHNOLOGY LTD.

S STRUCTURE

結構

採用硬度高達60.0HB的鋁合金材料.散熱快,耐腐蝕;持久耐用, 提供燈管壽命的保證

The hardness of aluminium alloy is up to 60.0HB, fast heat dissipation, corrosion resistant and durable. It provides a guarantee for the life of tube

臺灣最新一代LED進口芯片,利用點陣光源發光原理,使光源發光在節能環保的同時照度更均勻.確保卓越的光效及超長的使用壽命

Taiwan's latest generation of LED chips with light-emitting principle of dot-matrix increase the efficiency, uniformity of illuminance distribution and service life

內置智能IC第四代驅動器,恒流穩壓,構建穩定的工作環境.確保光源的正常運行


The 4th generation of intelligent IC driver produces constant current and stable voltage and ensures the light source in normal operation

優質PC(透明/乳白)燈罩,透光率高達90%.結合傳統燈管用戶的使用習慣,更貼合大眾習慣性用光感知度.高光度的同時更節能

High quality PC cover (transparent/milky) and 90% of transmission rate

選用進口耐高溫材料,充分保證高壓電遠離散熱器.免去鎮流器,安裝更方便

Imported durable high-temperature resistant material is selected to ensure high voltage keeping away from radiator. Without using ballast, it is easy for installation.

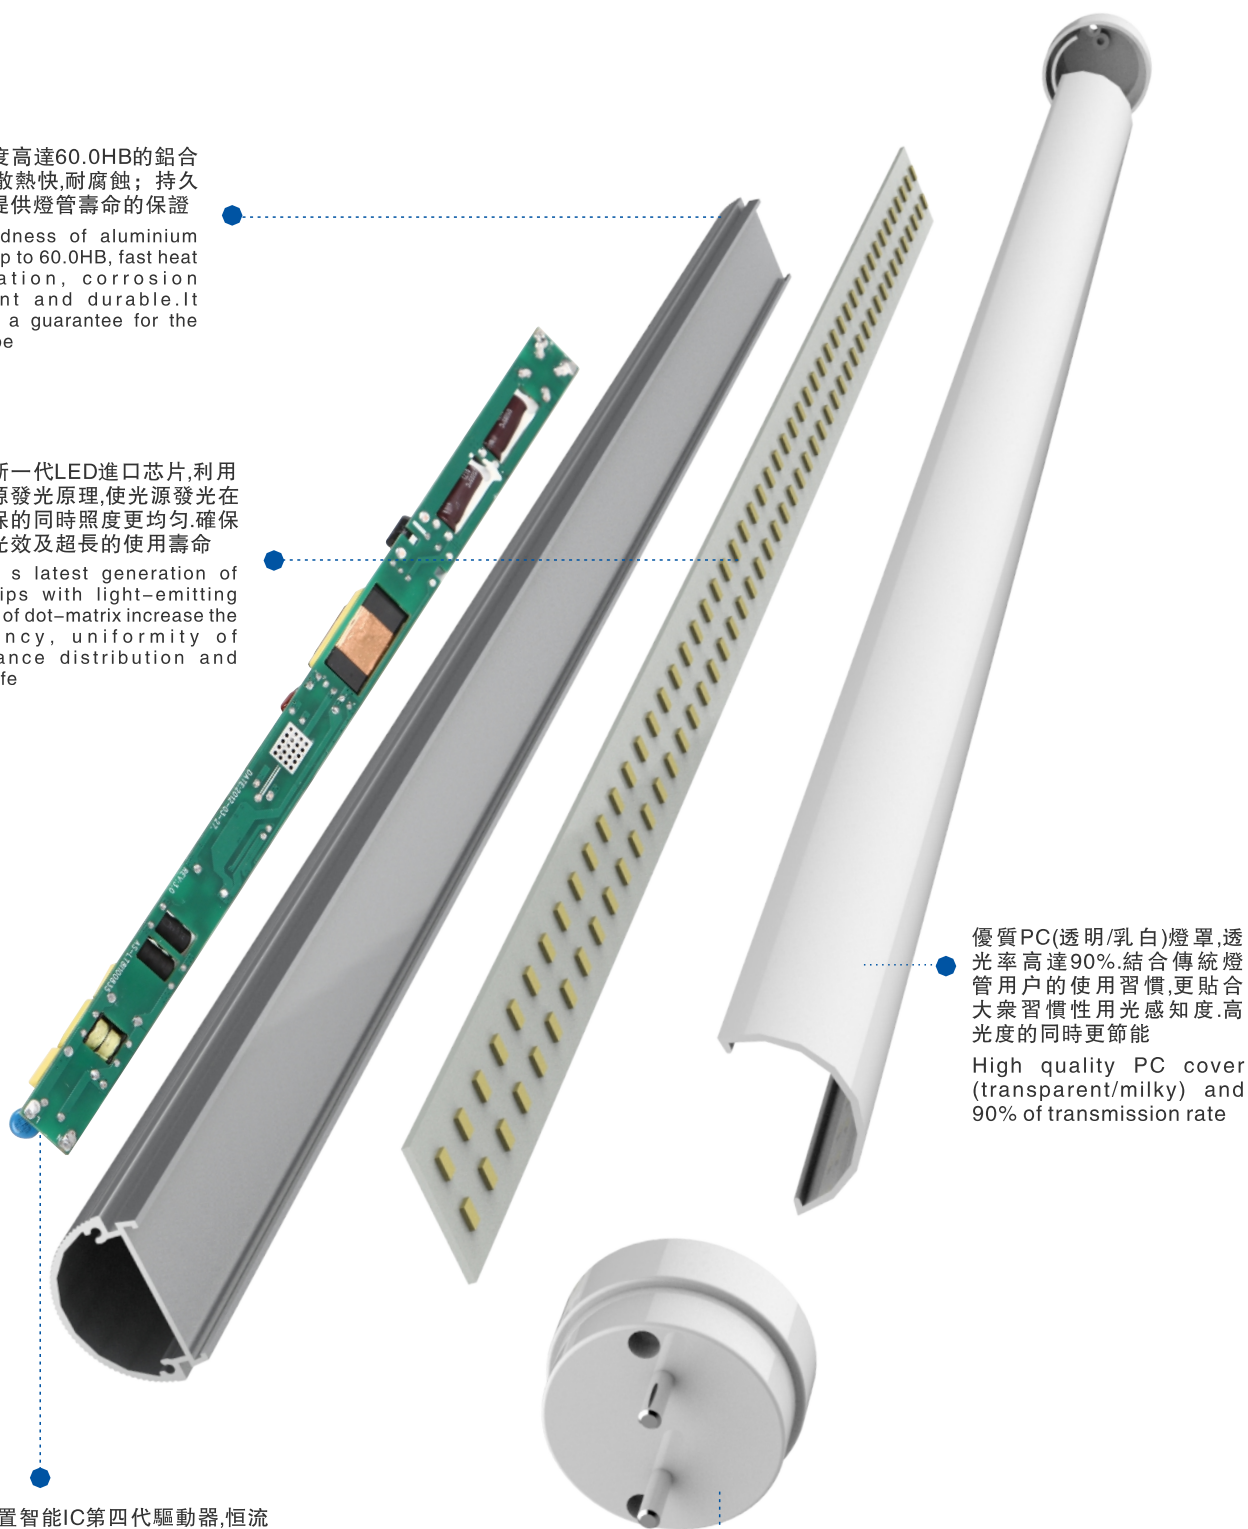

TUBE 燈管



CE

RoHS

110-240V
AC



6W

8W

12W



16W

up to
30,000
hours



規格詳述 (Specification)

產品名稱 (Product name)	LED T5/T8 燈管 LED T5/T8 tube			
產品型號 (Model No.)	ECO-T50606WTPA ECO-T50606TTPA	ECO-T51212WTPA ECO-T51212TTPA	ECO-T80608WNPA ECO-T80608TNPA	ECO-T81216WNPA ECO-T81216TNPA
應用範圍 (Application)	室內照明 Indoor lighting			
燈體材質 (Material)	鋁材+透明/乳白PC罩 Aluminium+transparent/milky PC cover			
功率 (Power)	6W	12W	8W	16W
輸入電壓 (Input voltage)	110V ~ 240V			
工作頻率 (Working frequency)	50 ~ 60 Hz			
工作溫度 (Working temperature)	-20°C ~ +60°C			
顯色指數 (Color rendering index)	Ra ≥ 75			
功率因數 (Power factor)	>0.9			
光通量 (Luminous flux)	610lm	1083lm	735lm	1486lm
發光角度 (Beam angle)	>120°			
色溫 (Color temperature)	2800-3200K/3900 ~ 4200K/5000 ~ 5500K			
使用壽命 (Service life)	Up to 30,000hrs			





尺寸圖 (SIZE)

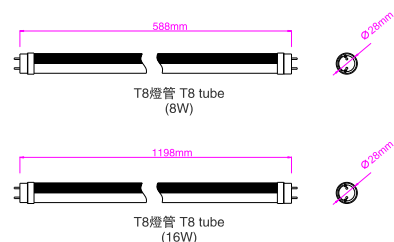

配光曲綫圖 (LIGHT DISTRIBUTION CURVE)





照度圖 (ILLUMINANCE DIAGRAM)



APPLICATION 應用場合

廣泛應用於酒店、酒吧、樓道、商場、洗手間、西餐廳、博物館、展覽館、門樓招牌、庫房、居家室內照明，氣氛營造等工程。

Hotel, pub, corridor, shopping mall, washroom, restaurant, museum, exhibition hall, lightbox display, warehouse, indoor lighting and other applications for creating atmosphere

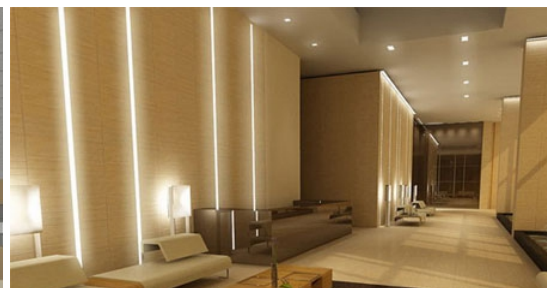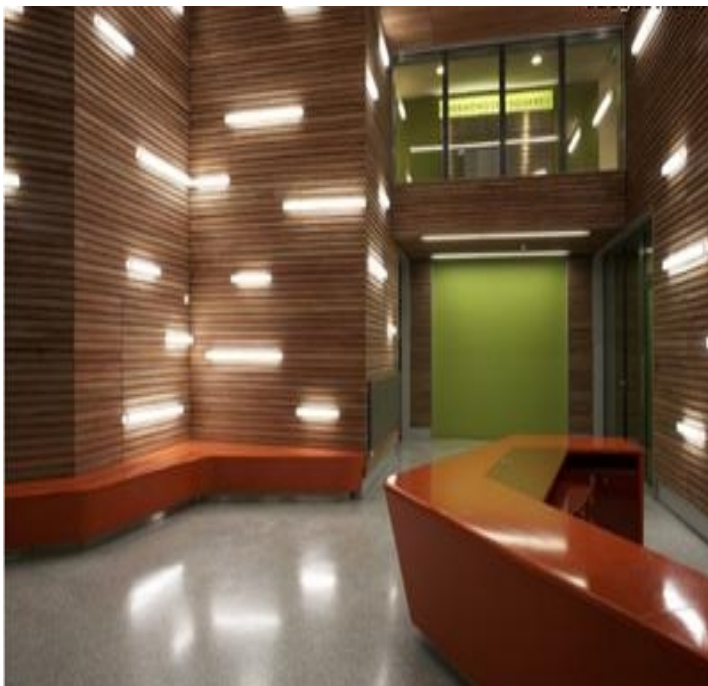

ALTERNATIVE 替代方案

型號 Model	LED燈管功率 LED tube power	LED燈管壽命 LED tube life	替換傳統燈管功率 Replace energy saving tube power	傳統燈管壽命 Energy saving tube life	節電率 Energy saving
ECO-T50606WTPA ECO-T50606TTPA	6W	30000hrs	14W	3000-5000hrs	60%~80%
ECO-T80608WNPA ECO-T80608TNPA	8W		18W		60%~80%
ECO-T51212WTPA ECO-T51212TTPA	12W		28W		60%~80%
ECO-T81216WNPA ECO-T81216TNPA	16W		36W		60%~80%

環態源環境科技有限公司(香港總公司)

ECOTECH ENVIRONMENTAL TECHNOLOGY LTD.(HONG KONG HEAD OFFICE)

地址：香港新界荃灣青山道388號中國染廠大廈25樓A室

Add: Unit A, 25/F, CDW Building, 388 Castle Peak Road, Tsuen Wan, N.T., Hong Kong

電話(Tel): +852-2304-8808

傳真(Fax): +852-2389-8453

網頁(Website): www.ecotech-hk.com

郵箱(E-mail): services@ecotech-hk.com

分公司 Subsidiaries

環態源科技發展(深圳)有限公司
ECOTECH TECHNOLOGY DEVELOPMENT(SHENZHEN)CO.,LTD.

環態源科技發展(長沙)有限公司
ECOTECH TECHNOLOGY DEVELOPMENT(CHANGSHA)CO.,LTD.

環態源科技發展(晉江)有限公司
ECOTECH TECHNOLOGY DEVELOPMENT(JINJIANG)CO.,LTD.

環態源工程技術(撫順)有限公司
ECOTECH ENGINEERING TECHNOLOGY(FUSHUN)CO.,LTD.